



Alfa Laval TL10

Gasketed plate-and-frame heat exchanger

Applications

General heating and cooling duties.

Standard design

The plate heat exchanger consists of a pack of corrugated metal plates with portholes for the passage of the two fluids between which heat transfer will take place.

The plate pack is assembled between a fix frame plate and a movable pressure plate and compressed by tightening bolts. The plates are fitted with a gasket which seals the interplate channel and directs the fluids into alternate channels. The number of plates is determined by the flow rate, physical properties of the fluids, pressure drop and temperature program. The plate corrugations promote fluid turbulence and support the plates against differential pressure.

The plate and the pressure plate are suspended from an upper carrying bar and located by a lower guiding bar, both of which are fixed to a support column.

Connections are located in the frame plate or, if either or both fluids make more than a single pass within the unit, in the frame and pressure plates.

Typical capacities

Liquid flow rate

Up to 50 kg/s (800 gpm), depending on media, permitted pressure drop and temperature program.

Plate types


TL10-B, TL10-P

Frame types


FM, FG and FS

Working principle

Channels are formed between the plates and the corner ports are arranged so that the two media flow through alternate channels. The heat is transferred through the plate between the channels, and complete counter-current flow is created for highest possible efficiency. The corrugation of the plates provides the passage between the plates, supports each plate against the adjacent one and enhances the turbulence, resulting in efficient heat transfer.

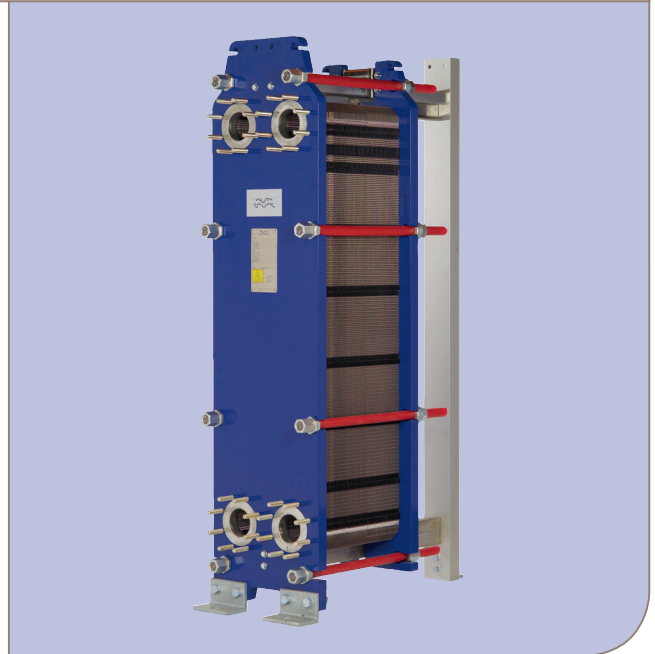

TL10-BFG

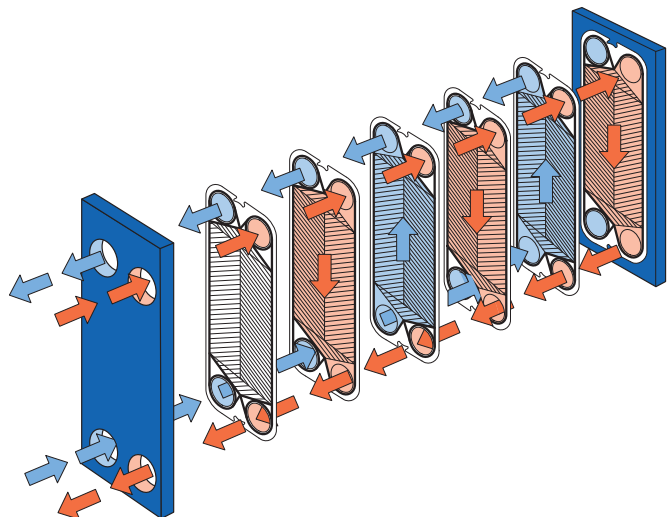

Flow principle of a plate heat exchanger

STANDARD MATERIALS

Frame plate

Mild steel, Epoxy painted

Nozzles

Carbon steel

Metal lined: Stainless steel, Titanium, Alloy 254, Alloy C276, Nickel

Rubber lined: Nitrile, EPDM

Plates

Stainless steel: Alloy 304, Alloy 316, Alloy 254, Alloy C276
Nickel, Titanium

Gaskets

Nitrile, EPDM, Viton®

Other grades and material available on request

TECHNICAL DATA

Pressure vessel codes, PED, ASME, pvcALST™

Mechanical design pressure (g) / temperature

FM	pvcALST™	1.0 MPa / 180°C
FG	PED, pvcALST™	1.6 MPa / 180°C
FG	ASME	150 psig / 482°F
FD	PED	2.5 MPa / 180°C
FS	ASME	400 psig / 482°F

Connections

Size: DN100 / NPS 4 / 100A


FM	pvcALST™	EN 1092-1 PN10, ASME B16.5 Class 150, JIS B2220 10K
FG	PED	EN 1092-1 PN10, ASME B16.5 Class 150
FG	pvcALST™	EN 1092-1 PN16, ASME B16.5 Class 150, JIS B2220 16K
FG	ASME	ASME B16.5 Class 150
FD	PED	EN 1092-1 PN25, ASME B16.5 Class 300, Special square flange
FD	pvcALST™	EN 1092-1 PN25, ASME B16.5 Class 150, JIS B2220 20K
FS	ASME	Special square flange

Standard EN 1092-1 corresponds to GOST 12815-80 and GB/T 9115.

Maximum heat transfer surface

250 m² (2700 sq. ft)

Dimensions

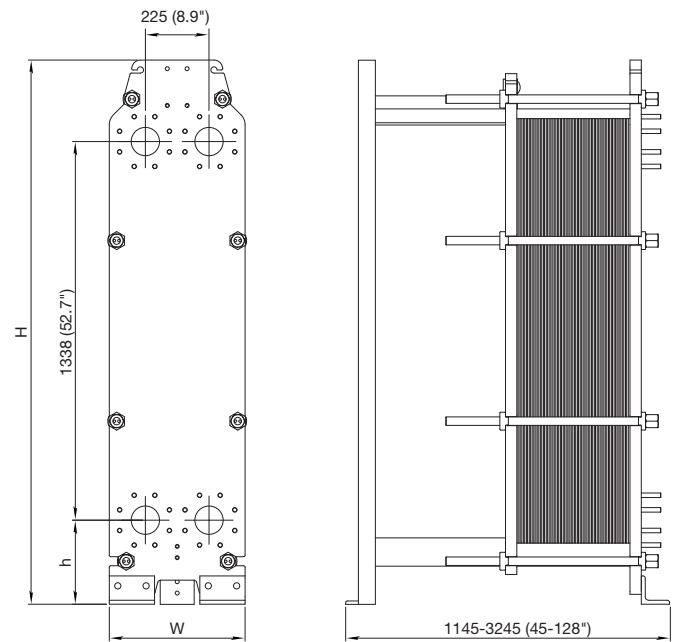

Measurements mm (inch)

Type	H	W	h
TL10-FM	1885 (74.2")	480 (18.9")	255 (10")
TL10-FG	1981 (78")	480 (18.9")	297 (11.7")
TL10-FD	1981 (78")	480 (18.9")	297 (11.7")
TL10-FS	1981 (78")	510 (20.1")	297 (11.7")

The number of tightening bolts may vary depending on pressure rating.

Particulars required for quotation

- Flow rates or heat load
- Temperature program
- Physical properties of liquids in question (if not water)
- Desired working pressure
- Maximum permitted pressure drop

How to contact Alfa Laval

Up-to-date AlfaLaval contact details for all countries are always available on our website on www.alfalaval.com